

CTB-20


CONTROL UNIT



when communication is **critical**

FEATURES

- Operator panel CTB-20 with 20 lines selection
- Operates with CU-20 or CU-200 central unit
- Single call/ / Group Call / All Call facility
- Socket for gooseneck or handheld microphone
- Dimmable panel background light
- Extension buttons with on light
- Buzzer indication of incoming calls
- Step volume control
- Call signal
- Output for extra signal device all lines

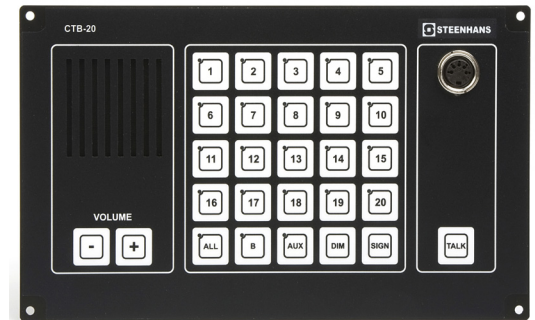

SPECIFICATIONS

Material / finish	Aluminium / black
Mounting	Flush with 4 x 4mm screws, Optional Back box for bulkhead mounting
Terminals	Plugable screw terminals for cable max. 2,5mm ²
Cable gland	2 x PG-16
Dimension (mm)	240W x 144H x 100D
Cut out dimension	224 x 132
Weight	Approx. 1.2 kg
Microphone input	Socket for handheld and electret gooseneck microphone
External connections	Central unit, ext. microphones, ext.loudspeaker
Front panel	Graphic front film
Switches	Push button type with LED indication
Loudspeaker	3 W / 8 ohm
IP rating	IP-22

ORDER NUMBER	DESCRIPTION	SHIP WEIGHT
3005020003	CTB-20 Control Unit, 20 Lines Panel Mounted	1.2 kg
Related Items		
3005020065	WBOKS Wall Mounted Box for ETB-5/10 and CTB-10/20	0.4 kg

CTB-20 CONTROL UNIT

